


EECO DOORS & ENTRANCES •UL CLASSIFIED AND LISTED




SINGLE SPEED



CENTER OPENING

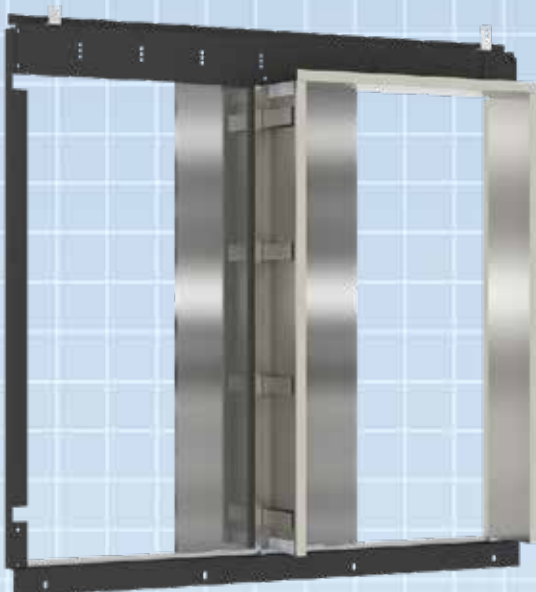

HALLWAY VIEW

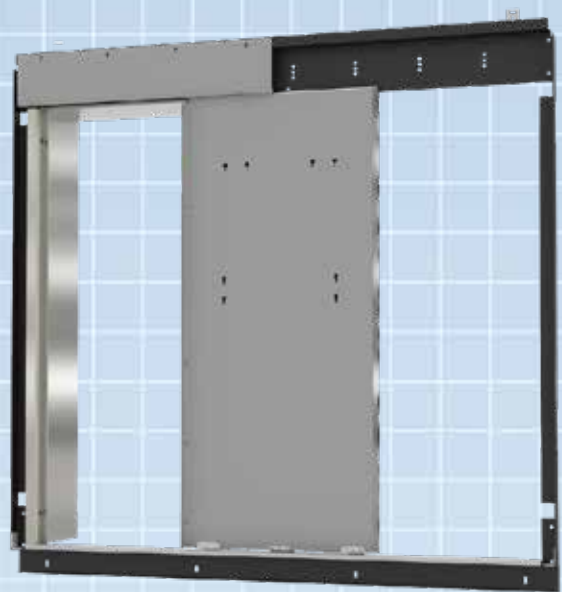

HOISTWAY VIEW



More information is available on our website:
www.elevatorequipment.com




Complete Unit consists of UL approved:

- Doors, Sight Guards, Gibs, Door Retainer Brackets and Fire Tabs
- Adjustable 7 Gauge Sill Angle
- Set of "Z" Brackets from bottom of frame to sill angle, holds a rigid clear opening
- Standard Aluminum Sill
- 14 ga Frames - Primed or Stainless Steel
- Fascia Plates (available in different sizes)
- Dust Cover Plate
- Units drilled to manufactured equipment
- Hardware
- Units come with knocked-down frames for shipping

SILL FINISHES




DOOR SIZES

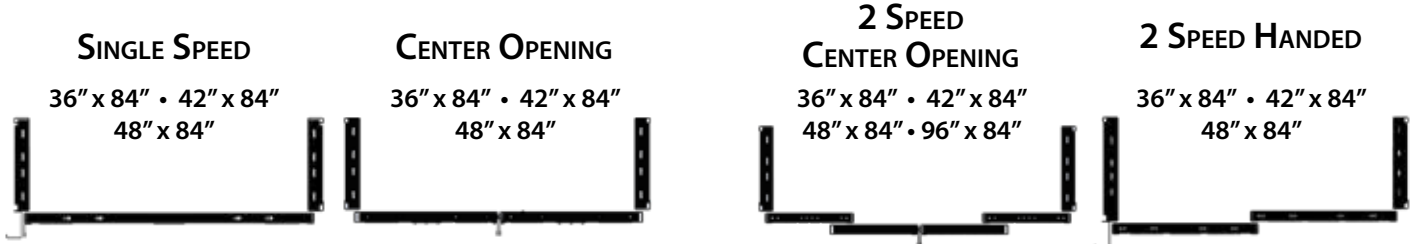

NOTE: Our standard height is 7' (84") and we are capable of designing and manufacturing doors with different widths, please contact EECO.

PRIMED



POWDER COAT



BLACK

WHITE

RED

BEIGE


BROWN

GREEN


BLUE

GRAY


5WL

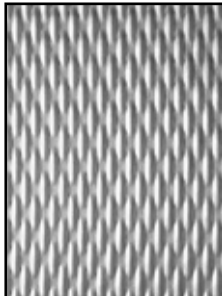

SANDEX

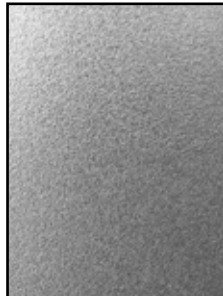

LINEN

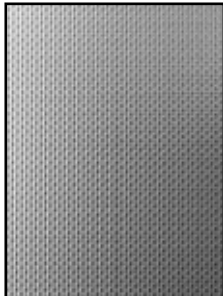

#4 BRUSHED



RANDOM SWIRL



OPTIONAL JAMB BRAILLE



STAR OF LIFE



NOTE: Other finishes are available, contact EECO. All colors and textures shown here are approximate representations only.