

JACK UNIT	PISTON OD	PACKING SET PART NUMBER	SOCKET HEAD CAP SCREW SIZE	TORQUE (ft/lbs)
PJR-275	2.750	42.002421000400	3/8"-16 X 2 3/4"	25-30
PJR-3NET	3.000	42.002421001000		
PJR-3R	3.437	42.002421001300		
PJR-387	3.875	42.002421001400		
PJR-4NET	4.000	42.002421001500	1/2"-13 X 2 3/4"	45-50
PJR-4	4.375	42.002421001600		
PJR-5NET	5.000	42.002421001800		
PJR-5	5.437	42.002421000700		
PJR-6NET	6.000	42.002421000900		
PJR-6	6.500	42.002421005000		
PJR-6SP				
PJR-7NET	7.000	42.002421002300	5/8"-11 X 2 3/4"	95-100
PJR-7	7.500	42.002421002400		
PJR-8NET	8.000	42.002421002500		
PJR-8	8.500	44.002421002600		
PJR-8SP				

## EECOLube




EECOLube is a performance improving friction modifier oil additive formulated to reduced "Stick Slip", rough starts & stops and prevent noise in hydraulic elevator systems.

## Pevicol



The **PeViCol PVC Cement (PVC-1)** was specially designed for gluing PVC pipe. This non-flammable cement does not require a primer. The low odor and low emissions allows it to be used indoors with minimal ventilation. The cement can be used in a temperature range from 32° - 175° F (0° - 80° C). PeViCol PVC Cement, a NordColl product, is not classified as an environmental toxin and the solvents in solution are biologically degradable.

## Piston Clamp/Wrench

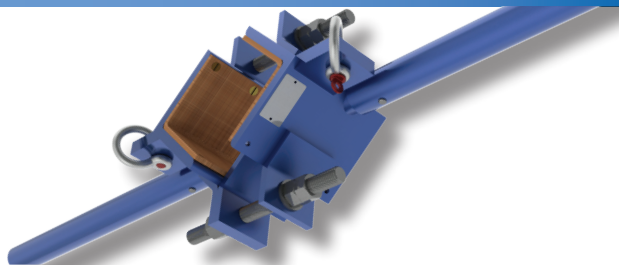


**Piston Clamp / Wrenches (PCW)** are designed to safely lift, hold, and tighten pistons during construction. The welded steel construction with replaceable tension pads and tensioning bolts for applying equal pressure around a piston ensures higher gripping force than wooden clamps. The maximum rated load for the Piston Clamp/Wrench is 1,950 lbs.

## Cylinder Lifting Clamp




**Cylinder Lifting Clamps (CLC)** are designed to lift and hold hydraulic jack cylinders safely during construction. Constructed of formed steel bar for light weight and easy handling. These clamps are equipped with shackles for lifting and tensioning bolts for applying pressure around cylinder pipe.

## Piston Repair Kit

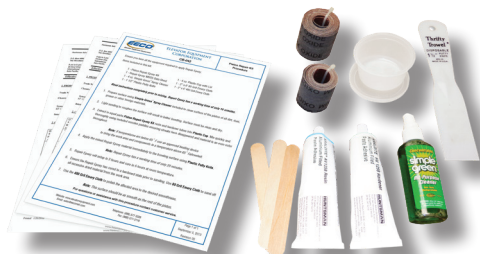

This **Piston Repair Kit (PRK-01)** is designed to repair damaged pistons with deep scratches or pits that cause excessive weeping of oil through the seals. The two part metal filled epoxy is ideal for filling in deep scratches and pits that are too deep to be removed with just light sanding. Using this kit, once properly applied, can prolong a damaged piston and seal life.

## PVC Lifting Clamp

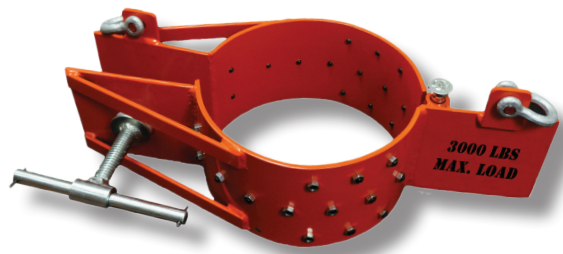

**PVC Lifting Clamps (PVCC)** are designed to lift and hold flush joint PVC pipe safely. Constructed of formed and welded 1/4" steel plate for light weight and easy handling, these clamps are equipped with two holding tabs and shackles for lifting. A tee bolt tensioner is used to apply pressure around PVC pipe with cupped set screws for gripping. The maximum rated load for the PVC Lifting Clamp is 3,000 lbs.