
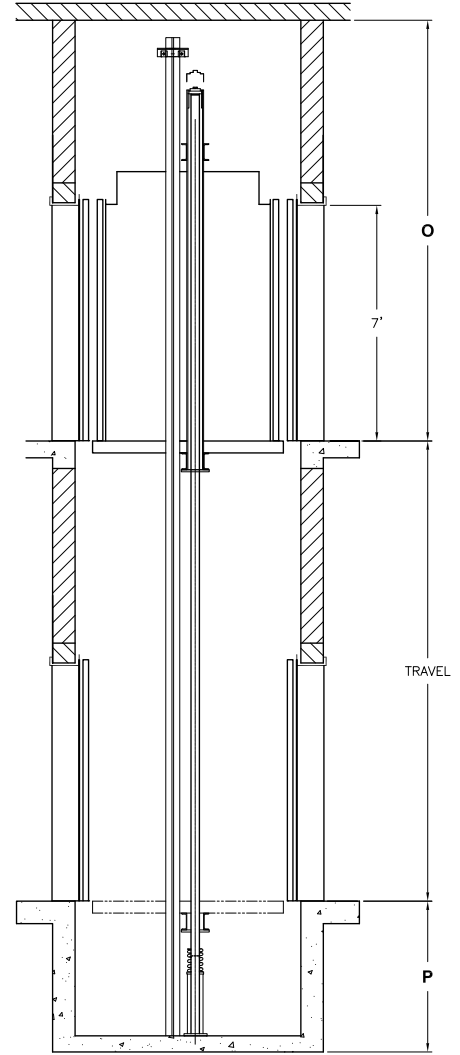


GROUP ONE 3 STAGE TELESCOPIC

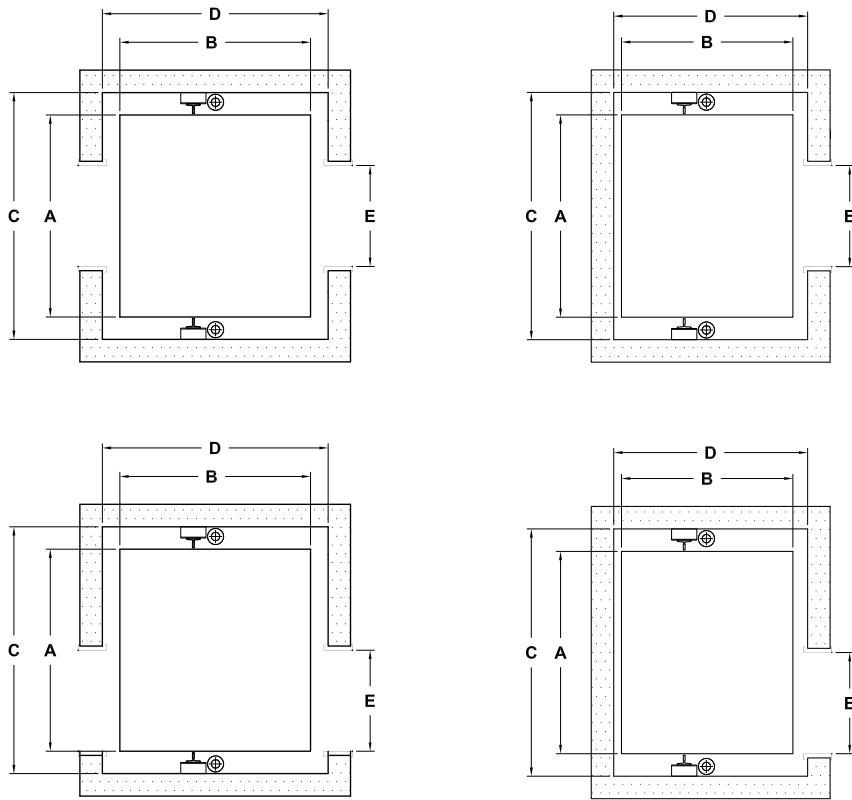

A = PLATFORM WIDTH **C = HOISTWAY WIDTH** **E = CLEAR DOOR OPENING** **P = PIT DEPTH**
B = PLATFORM DEPTH **D = PLATFORM DEPTH** **O = OVERHEAD**

Capacity (lbs)	Platform A x B	Hoistway C x D	Front/Rear	Clear Inside W x D	Door Type	Door Width E
2100	6' -0" x 5' -1"	7' -8" x 5' -9"	F	5' -8" x 4' -3"	1-SP	3' -0"
2100	6' -0" x 5' -8"	7' -8" x 6' -8 1/2"	F/R	5' -8" x 4' -4"	1-SP	3' -0"
2500	7' -0" x 5' -1"	8' -8" x 5' -9"	F	6' -8" x 4' -3"	1-SP	3' -6"
2500	7' -0" x 5' -8"	8' -8" x 6' -8 1/2"	F/R	6' -8" x 4' -4"	1-SP	3' -6"
3000	7' -0" x 5' -6"	8' -8" x 6' -2"	F	6' -8" x 4' -8"	1-SP	3' -6"
3000	7' -0" x 6' -1"	8' -8" x 7' -1 1/2"	F/R	6' -8" x 4' -9"	1-SP	3' -6"
3500	7' -0" x 6' -2"	8' -8" x 6' -10"	F	6' -8" x 5' -4"	1-SP	3' -6"
3500	7' -0" x 6' -9"	8' -8" x 7' -9 1/2"	F/R	6' -8" x 5' -5"	1-SP	3' -6"
4500H	6' -0" x 9' -2"	7' -8" x 10' -0"	F	5' -8" x 8' -2 1/2"	2-SP	4' -0"
4500H	6' -0" x 9' -10 1/2"	7' -8" x 11' -2"	F/R	5' -8" x 8' -3 1/2"	2-SP	4' -0"

EECO's Dual Holeless Group One elevator with dual three-stage jacks can solve space limitation problems.

This holeless design eliminates the cost of drilling.

Verify all dimensions with EECO prior to construction. Consult EECO Engineering for required overhead and pit depth dimensions.