


# GROUP ONE ROPED CANTILEVER HOLELESS

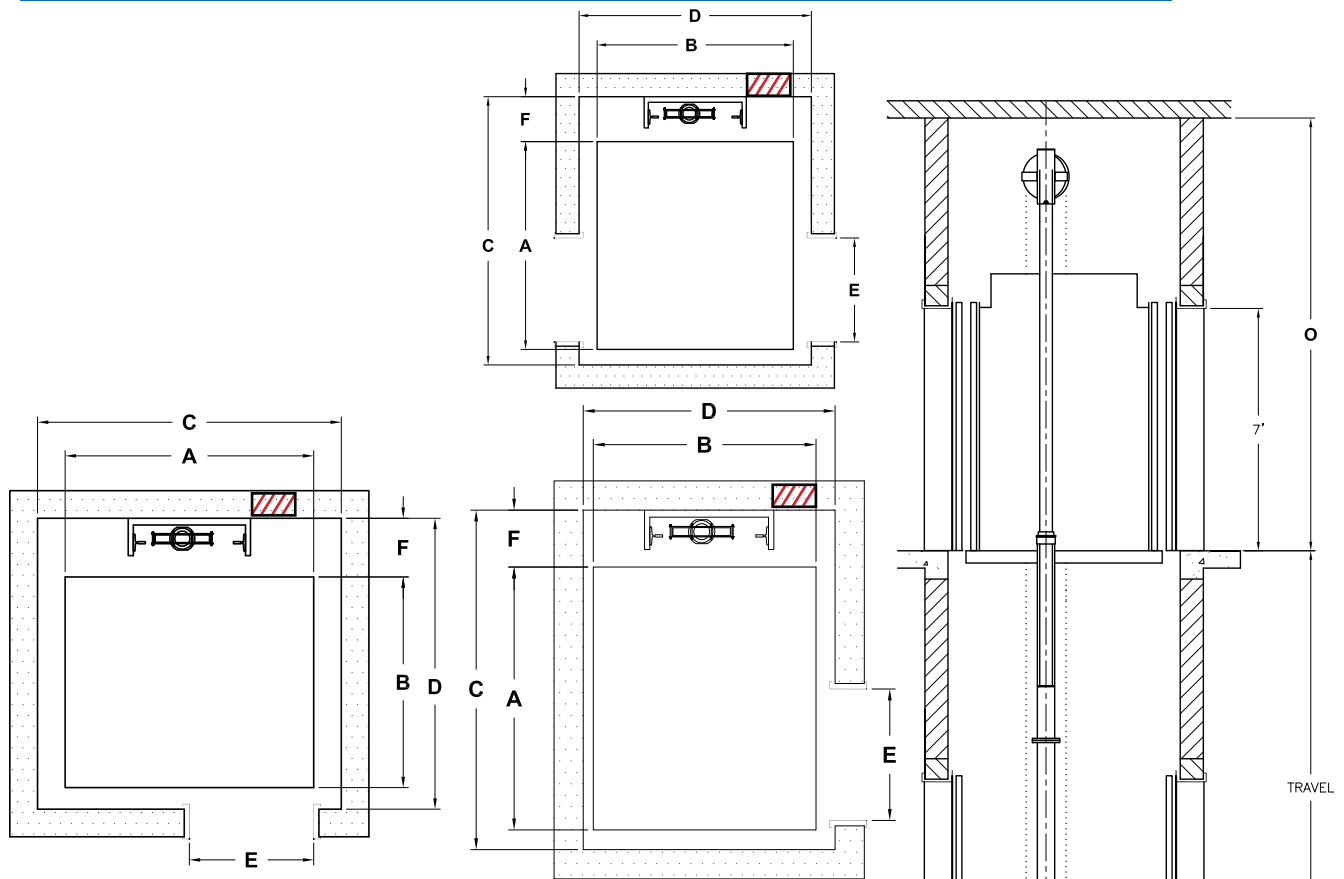

- A = PLATFORM WIDTH**      **D = PLATFORM DEPTH**      **O = OVERHEAD**  
**B = PLATFORM DEPTH**      **E = CLEAR DOOR OPENING**      **P = PIT DEPTH**  
**C = HOISTWAY WIDTH**      **F = 20 INCHES**      **▨ = GOV. ACCESS DOOR**

Capacity (lbs)	Platform A x B	Hoistway C x D	Front/Rear	Clear Inside W x D	Door Type	Door Width E
<b>Roped Canitlever Holeless Rear Slung</b>						
2100	6' -0" x 5' -1"	7' -4" x 7' -3"	F	5' -8" x 4' -3"	1-SP	3' -0"
2500	7' -0" x 5' -1"	8' -4" x 7' -3"	F	6' -8" x 4' -3"	1-SP	3' -6"
3000	7' -0" x 5' -6"	8' -4" x 7' -8"	F	6' -8" x 4' -8"	1-SP	3' -6"
3500	7' -0" x 6' -2"	8' -4" x 8' -4"	F	6' -8" x 5' -4"	1-SP	3' -6"
<b>Roped Canitlever Holeless Side Slung</b>						
2100	6' -0" x 5' -1"	8' -2" x 5' -9"	F	5' -8" x 4' -3"	1-SP	3' -0"
2100	6' -0" x 5' -8"	8' -2" x 6' -8 1/2"	F/R	5' -8" x 4' -4"	1-SP	3' -0"
2500	7' -0" x 5' -1"	9' -2" x 5' -9"	F	6' -8" x 4' -3"	1-SP	3' -6"
2500	7' -0" x 5' -8"	9' -2" x 6' -8 1/2"	F/R	6' -8" x 4' -4"	1-SP	3' -6"
3000	7' -0" x 5' -6"	9' -2" x 6' -2"	F	6' -8" x 4' -8"	1-SP	3' -6"
3000	7' -0" x 6' -1"	9' -2" x 7' -1 1/2"	F/R	6' -8" x 4' -9"	1-SP	3' -6"
3500	7' -0" x 6' -2"	9' -2" x 6' -10"	F	6' -8" x 5' -4"	1-SP	3' -6"
3500	7' -0" x 6' -9"	9' -2" x 7' -9 1/2"	F/R	6' -8" x 5' -5"	1-SP	3' -6"

The EECO Roped Cantilever holeless design uses wire ropes in conjunction with a single hydraulic jack to lift the elevator at a 1:2 ratio. For each foot the jacks rise, the elevator rises two feet.

EECO only uses the highest quality industry standard components in all our products for reliability and easy availability.

This design also eliminates the cost of drilling.

Verify all dimensions with EECO prior to construction. Consult EECO Engineering for required overhead and pit depth dimensions.